


COIL NAILER



RN45

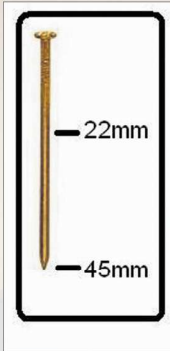

Specification	
Length	260mm
Height	260mm
Wide	110mm
Weight	2.4kgs
Load Capacity	120 nails
Operating Pressure	90-110 psi
Magazine Type	Convex Type
Magazine Loaded	Bottom Loading Magazine

Applicable Fastener Size	
Nail Shank (inch)	3.05mm(0.12")
Nail Length (inch)	22mm(7/8")~45mm(1-4/5")

Applications:


Roofing, Insulated Sheathing and Siding

Feature:

- *Exchangable spare parts with HITACHI roofing coil nailer (Model NO.: NV45AB)
- *Accepts all 3.05mm diameter 15 degree coil roofing nails
- *Durable steel safety foot with carbide inserts



CN50

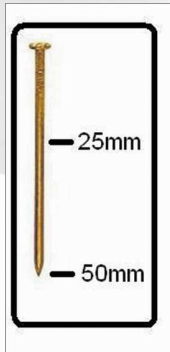

Specification	
Length	260mm
Height	260mm
Wide	110mm
Weight	2kgs
Load Capacity	400 nails
Operating Pressure	90-110 psi
Magazine Type	Convex Type
Magazine Loaded	Bottom Loading Magazine

Applicable Fastener Size	
Nail Shank (inch)	2.1mm(0.08")
Nail Length (inch)	25mm(1")~50mm(2")

Applications:

Roofing, Shingles, Subfloor, Fencing
 Sheathing, Decking, Packaging, Exterior trim
 Pallet and Crate manufacturing,

Feature:

- *Exchangable spare parts with HITACHI roofing coil nailer (Model NO.: NV50A1)
- *Durable steel safety foot with carbide inserts



CN50WPC

CN50WP

Cap Tool-Coil Nailer

Specification

Length	220mm
Height	280mm
Wide	110mm(CN50WP)/164mm (CN50WPC)
Weight	1.5kg (CN50WP)/2kgs (CN50WPC)
Load Capacity	400 nails (Wire)/200 nails (Sheet)
Operating Pressure	100-120 psi
Magazine Type	Convex Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Single Fire and Consecutive Driving Of Nails




Applicable Fastener Size

Nail Shank of Wire Collation (inch)	2.1mm(0.08")~2.3mm(0.09")
Nail Length of Wire Collation (inch)	25mm(1")~50mm(2")

Applicable Fastener Size

Nail Shank of Sheet Collation (inch)	1.4mm(0.055")~1.8mm(0.071")
Nail Length of Sheet Collation (inch)	22mm(1-1/8")~38mm(1-1/2")



Applications:

Roofing, Shingles, Subfloor, Fencing
 Sheathing, Decking, Packaging,
 Pallet and Crate manufacturing,
 Exterior trim

Feature:

- * Drives wire and plastic sheet collated nails
- * Depth of drive dial allows convenient and precise nails settings
- * CN50WPC can use with plastic cap/metal cap stainless cap and waterproof stainless cap

COIL NAILER



CN60/CN60(H)

Specification	
Length	270mm
Height	270mm
Wide	130mm
Weight	2.54kgs
Load Capacity	350 nails
Operating Pressure	100-120 psi
Magazine Type	Flat Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

Applicable Fastener Size	
Nail Shank (inch)	2.1mm(0.083")~2.5mm(0.098")
Nail Length (inch)	32mm(1-1/4")~60mm(2-3/8")

Applications:


Siding, Pallet/Crate manufacturing, Framing, Sub-Floor, Trusses Sheathing, Decking

Feature:

- * Adjustable safety (Item NO.: BCN60/LCN60)
- * Similar to MAX CN55
- * Adjustable exhaust cover



BCN60/LCN60

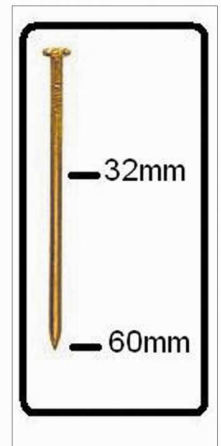

Adjustable safety

“More Powerful CN60(H)/LCN60”

CN65WP/CN65WP2





Specification	
Length	270mm
Height	295mm
Wide	130mm
Weight	2.7kgs
Load Capacity	200-300 nails
Operating Pressure	100-120 psi
Magazine Type	Flat and Convex Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

CN65WP

Applicable Fastener Size	
Nail Shank (inch)	2.5mm(0.098")~2.9mm(0.114")
Nail Length (inch)	32 mm (1-1/4")~65mm(2-1/2")
Head Dia.	6.0mm ~ 7.0mm
Collated	Wire or Plastic Sheet

CN65WP2

Applicable Fastener Size	
Nail Shank (inch)	2.1mm(0.08")~2.5mm(0.098")
Nail Length (inch)	32 mm (1-1/4")~65mm(2-1/2")
Head Dia.	5.0mm ~ 6.0mm
Collated	Wire or Plastic Sheet



BCN70

Specification	
Length	300mm
Height	360mm
Wide	130mm
Weight	3.45kgs
Load Capacity	250-300 nails
Operating Pressure	100-120 psi
Magazine Type	Flat Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

Applicable Fastener Size	
Nail Shank (inch)	2.3mm(0.09")~2.9mm(0.114")
Nail Length (inch)	38 mm (1-1/2")~70mm(2-3/4")

Applications:

Siding, Pallet/Crate manufacturing, Framing, Sub-Floor, Trusses Sheathing, Decking

Feature:

- * Adjustable safety
- * Drives wire or plastic sheet collated nails (Item NO.: CN65WP/CN65WP2)
- * Adjustable exhaust cover

COIL NAILER



CN75WP

Specification	
Length	300mm
Height	318mm
Wide	130mm(CN75WP)/207mm(CN75WPC)
Weight	2.7kgs (CN75WP)/3.3 kgs (CN75WPC)
Load Capacity	400 nails (Wire)/200 nails (Sheet)
Operating Pressure	100-120 psi
Magazine Type	Flat and Convex Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

Applicable Fastener Size

Nail Shank of Wire Collation (inch)	2.3mm(0.09")~2.9mm(0.114")
Nail Length of Wire Collation (inch)	38 mm (1-1/2")~75mm(2-3/4")

Applicable Fastener Size

Nail Shank of Sheet Collation (inch)	2.3mm(0.09")~2.5mm(0.098")
Nail Length of Sheet Collation (inch)	45 mm (1-3/4")~57mm(2-1/4")

Applications:

Siding, Pallet/Crate manufacturing, Framing,
Sub-Floor, Trusses Sheathing, Decking


Feature:

- * Depth of drive adjustment to countersink or flush drive nails
- * Drives wire and plastic sheet collation nails
- * Adjustable exhaust cover
- * Safe Trigger unit
- * CN75WPC can use for plasit cap/metal cap/stainless cap/
waterproof stainless cap



CN75WPC


Cap Tool-Coil Nailer





BCN90

Specification	
Length	300mm
Height	380mm
Wide	130mm
Weight	3.7kgs
Load Capacity	225-300 nails
Operating Pressure	100-120 psi
Magazine Type	Flat Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

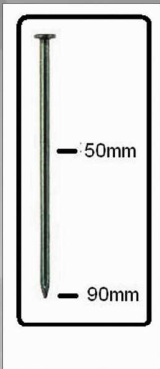

CN90WPC

Applications:

Siding, Framing, Decking
 Pallet/Crate manufacturing,
 Sub-Floor, Trusses Sheathing,



CN90WP



Cap Tool-Coil Nailer

Feature:

- * Depth of drive adjustment to countersink or flush drive nails
- * Adjustable exhaust cover
- * Safety Trigger unit
- * CN90WPC can use with plastic cap/metal cap/stainless cap/waterproof stainless cap
- * Drives wire and plastic sheet collated nails (Item NO.:CN90WP /CN90WPC)

Specification	
Length	300mm
Height	330mm
Wide	130mm(CN90WP)/207MM(CN90PWPC)
Weight	3kgs (CN90WP)/3.6kg (CN90WPC)
Load Capacity	400 nails(Wire)/200 nails(Sheet)
Operating Pressure	100-120 psi
Magazine Type	Flat and Convex Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Consecutive Driving Of Nails

Applicable Fastener Size

Nail Shank of Wire Collation (inch)	2.5mm(0.098")~3.3mm(0.13")
Nail Shank of Sheet Collation (inch)	2.5 mm (0.098")~2.9mm(0.114")
Nail Length (inch)	50mm(2") ~ 90mm(3-1/2")

COIL NAILER



CN100WP/CN100WP2

Specification	
Length	380mm
Height	420mm
Wide	113mm
Weight	5kgs
Load Capacity	200-300 nails
Operating Pressure	100-120 psi
Magazine Type	Flat Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Single Fire and Consecutive Driving Of Nails

CN100WP

Applications:

Siding, Pallet/Crate manufacturing,
Framing, Sub-Floor,
Trusses Sheathing, Decking


Feature:

- * Depth of drive adjustment to countersink or flush drive nails
- * Drives wire or plastic sheet collated nails
- * Adjustable exhaust cover


Applicable Fastener Size	
Nail Shank (inch)	3.3mm(0.13")~3.8mm(0.15")
Nail Length (inch)	50 mm (2")~100mm(4")
Head Dia.	7.2mm ~ 8.0mm
Collated	Wire or Plastic Sheet

CN100WP2

Applicable Fastener Size	
Nail Shank (inch)	2.5mm(0.098")~3.3mm(0.13")
Nail Length (inch)	50 mm (2")~100mm(4")
Head Dia.	6.0mm ~ 7.2mm
Collated	Wire or Plastic Sheet

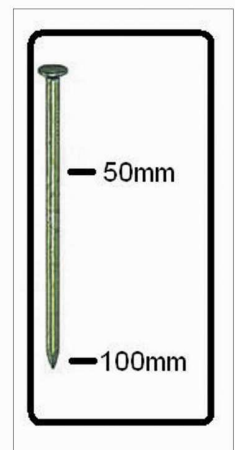

CN130WP/CN130WP2

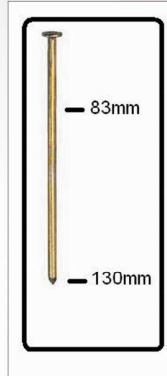

Specification

Length	380mm
Height	480mm
Wide	113mm
Weight	5.5kgs
Load Capacity	200-300 nails
Operating Pressure	100-120 psi
Magazine Type	Flat Type
Magazine Loaded	Side Loading Magazine
Trigger Type	Single Fire and Consecutive Driving Of Nails

CN130WP

Applicable Fastener Size

Nail Shank (inch)	3.3mm(0.13")~3.8mm(0.15")
Nail Length (inch)	83 mm (3-1/8")~130mm(5-1/8")
Head Dia.	7.2mm ~ 8.0mm
Collated	Wire or Plastic Sheet



CN130WP2

Applicable Fastener Size

Nail Shank (inch)	2.5mm(0.098")~3.3mm(0.13")
Nail Length (inch)	83 mm (3-1/8")~130mm(5-1/8")
Head Dia.	6.0mm ~ 7.2mm
Collated	Wire or Plastic Sheet

Applications:

Siding, Pallet/Crate manufacturing, Framing,
Sub-Floor, Trusses Sheathing, Decking

Feature:

- * Depth of drive adjustment to countersink or flush drive nails
- * Drives wire or plastic sheet collated nails
- * Adjustable exhaust cover